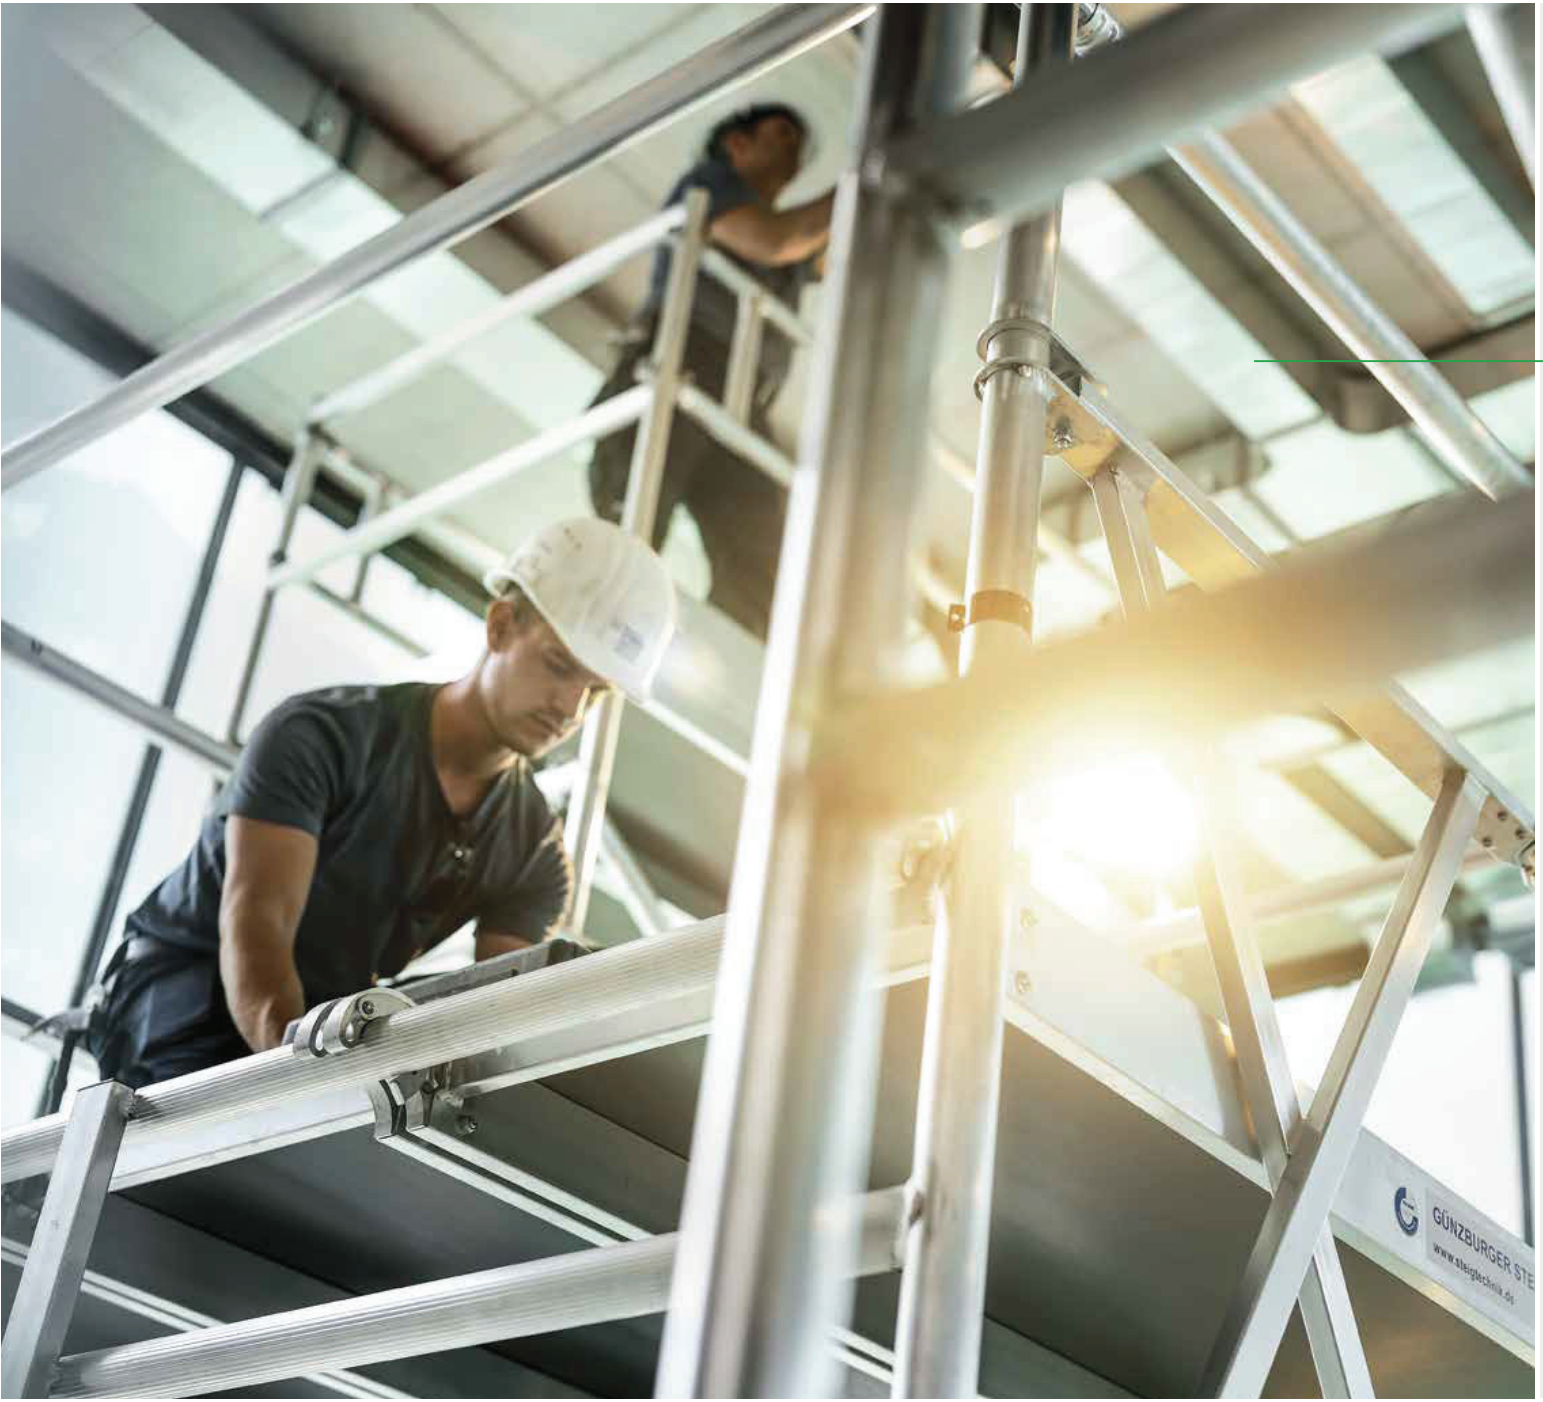


# 05 | Scaffolding


- Mobile scaffolding 244
- Folding scaffolding 260
- Ladder platforms 267
- Components, accessories and spare parts 268






GÜNZBURGER STEIGTECHNIK

# Scaffolding

Simple and quick to set up, flexible in combination

safety+

## Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards

## Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent

## Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability

## Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs



## Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools

## Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application

## Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant

15 YEAR QUALITY GUARANTEE

TÜV NORD Made in Germany

**1–3** Express delivery programme

Available for delivery within 1–3 working days, see page 335 for details.

GS-tested, in accordance with European standard DIN EN 1004 or type-tested in accordance with the test principles for small scaffolding, Ordinance on Industrial Safety and Health (BetrSichV) and applicable German Social Accident Insurance (DGUV) regulations.

Fig.: Order no. 170335

# Mobile scaffolding with chassis bar

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- Chassis bar made of galvanized steel for easy change of location
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Easy moving of the scaffolding on the chassis bar by loosening eight screws
- Central and lateral installation possible
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Space-saving storage thanks to handy individual parts
- Working heights up to 12.5 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²



| A \| Approx. max. working height in m | 4.40 | 5.50 | 6.50 | 7.50 |
|---|---|---|---|---|
| B \| Scaffolding height in m | 3.35 | 4.45 | 5.45 | 6.45 |
| C \| Platform height in m | 2.35 | 3.45 | 4.45 | 5.45 |
| **Platform size 0.75 x 1.80 m** | | | | |
| Weight in kg | 81.0 | 128.0 | 137.0 | 168.0 |
| Order no. | 170235 | 170335 | 170435 | 170535 |
| **Platform size 0.75 x 2.45 m** | | | | |
| Weight in kg | 93.0 | 142.0 | 152.0 | 190.0 |
| Order no. | 171235 | 171335 | 171435 | 171535 |
| **Platform size 0.75 x 3.00 m** | | | | |
| Weight in kg | 100.0 | 148.0 | 159.0 | 203.0 |
| Order no. | 172235 | 172335 | 172435 | 172535 |

The height dimensions without chassis bars are reduced by 0.10 m each





| Platform size | | 0.75 x 1.80 m | | | | | | | | | 0.75 x 2.45 m | | | | | | | | | 0.75 x 3.00 m | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 |
| Parts list | Order no. | 170235 | 170335 | 170435 | 170535 | 170635 | 170735 | 170835 | 170935 | 170035 | Order no. | 171235 | 171335 | 171435 | 171535 | 171635 | 171735 | 171835 | 171935 | 171035 | Order no. | 172235 | 172335 | 172435 | 172535 | 172635 | 172735 | 172835 | 172935 | 172035 |
| Plug-on frame 1.00 m | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – |
| Plug-on frame 2.00 m | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Railing frame 1.00 m | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 27956 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 27957 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 |
| Platform with flap | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 27910 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 27933 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |
| Toe board front side | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 27908 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 27938 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Chassis bar 2.00 m | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 240 | 60 | 90 | 140 | 160 | 210 | 250 | 260 | 300 | 240 | 0 | 20 | 30 | 50 | 90 | 120 | 150 | 150 | 220 | 0 | 0 | 10 | 40 | 80 | 100 | 100 | 130 |
| | Lateral installation | n.p. | 110 | 140 | 190 | 220 | 270 | 300 | 340 | 370 | n.p. | 100 | 140 | 180 | 220 | 260 | 290 | 340 | 360 | n.p. | 100 | 130 | 170 | 200 | 250 | 290 | 320 | 350 |
| Outdoor use | Central installation | 240 | 60 | 100 | 160 | 240 | 320 | n.a. | n.a. | n.a. | 240 | 20 | 110 | 170 | 310 | 400 | n.a. | n.a. | n.a. | 260 | 30 | 150 | 210 | 380 | 480 | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | 120 | 200 | 270 | 380 | 390 | n.a. | n.a. | n.a. | n.p. | 140 | 250 | 320 | 470 | 570 | n.a. | n.a. | n.a. | n.p. | 180 | 290 | 370 | 540 | 650 | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

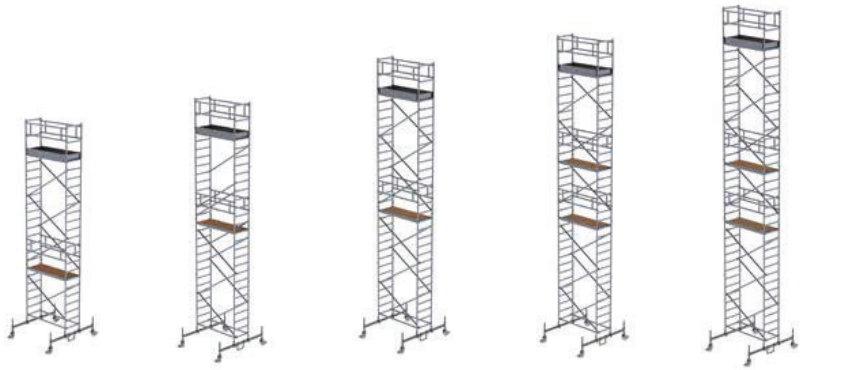

| 8.50 | 9.50 | 10.50 | 11.50 | 12.50 |
|---|---|---|---|---|
| 7.45 | 8.45 | 9.45 | 10.45 | 11.45 |
| 6.45 | 7.45 | 8.45 | 9.45 | 10.45 |
| | | | | |
| 177.0 | 188.0 | 198.0 | 228.0 | 238.0 |
| 170635 | 170735 | 170835 | 170935 | 170035 |
| | | | | |
| | | | | |
| 201.0 | 214.0 | 225.0 | 262.0 | 273.0 |
| 171635 | 171735 | 171835 | 171935 | 171035 |
| | | | | |
| | | | | |
| 214.0 | 227.0 | 238.0 | 281.0 | 292.0 |
| 172635 | 172735 | 172835 | 172935 | 172035 |
| | | | | |

Fig.: Order no. 173335

# Mobile scaffolding with chassis bar and double-size platform

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Large-format work surface with 1.35 m width
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- Chassis bar made of galvanized steel for easy change of location
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Easy moving of the scaffolding on the chassis bar by loosening eight screws
- Central and lateral installation possible
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 13.5 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²




Chassis bar not included in standard scope of delivery

| | | | | |
|---|---|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 5.40 | 6.50 | 7.50 |
| B \| Scaffolding height in m | 3.35 | 4.35 | 5.45 | 6.45 |
| C \| Platform height in m | 2.35 | 3.35 | 4.45 | 5.45 |
| **Platform size 1.35 x 1.80 m** | | | | |
| Weight in kg | 106.0 | 119.0 | 167.0 | 216.0 |
| Order no. | 173235 | 173335 | 173435 | 173535 |
| **Platform size 1.35 x 2.45 m** | | | | |
| Weight in kg | 122.0 | 137.0 | 186.0 | 246.0 |
| Order no. | 174235 | 174335 | 174435 | 174535 |
| **Platform size 1.35 x 3.00 m** | | | | |
| Weight in kg | 133.0 | 148.0 | 198.0 | 208.0 |
| Order no. | 175235 | 175335 | 175435 | 175535 |



The height dimensions without chassis bars are reduced by 0.10 m each





| Platform size | | 1.35 x 1.80 m | | | | | | | | | | 1.35 x 2.45 m | | | | | | | | | | 1.35 x 3.00 m | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 3.35 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | 11.45 | 2.35 | 3.35 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | 11.45 | 2.35 | 3.35 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | 11.45 |
| Parts list | Order no. | 173235 | 173335 | 173435 | 173535 | 173635 | 173735 | 173835 | 173935 | 173035 | 173135 | Order no. | 174235 | 174335 | 174435 | 174535 | 174635 | 174735 | 174835 | 174935 | 174035 | 174135 | Order no. | 175235 | 175335 | 175435 | 175535 | 175635 | 175735 | 175835 | 175935 | 175035 | 175135 |
| Plug-on frame 1.00 m | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 |
| Plug-on frame 2.00 m | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 |
| Railing frame 1.00 m | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 27956 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 27957 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 |
| Platform with flap | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27910 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27933 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| Platform without flap | 27932 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27930 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27934 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| Toe board front side | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 | 27908 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 | 27938 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Chassis bar 2.00 m | 27923 | - | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | - | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | - | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | | Ballasting kg | | | | | | | | | | Ballasting kg | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 60 | 130 | 70 | 90 | 120 | 180 | 210 | 210 | 250 | 290 | 40 | 120 | 0 | 0 | 20 | 60 | 90 | 70 | 100 | 140 | 30 | 100 | 0 | 0 | 0 | 30 | 60 | 30 | 60 | 110 |
| | Lateral installation | n.p. | n.p. | 80 | 100 | 140 | 180 | 220 | 230 | 260 | 300 | n.p. | n.p. | 70 | 80 | 110 | 160 | 190 | 190 | 220 | 270 | n.p. | n.p. | 50 | 60 | 90 | 140 | 170 | 160 | 200 | 240 |
| Outdoor use | Central installation | 80 | 160 | 160 | 250 | 340 | 490 | n.a. | n.a. | n.a. | n.a. | 90 | 190 | 70 | 150 | 220 | 350 | n.a. | n.a. | n.a. | n.a. | 100 | 190 | 90 | 180 | 260 | 410 | n.a. | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | n.p. | 160 | 250 | 340 | 490 | n.a. | n.a. | n.a. | n.a. | n.p. | n.p. | 140 | 240 | 310 | 440 | n.a. | n.a. | n.a. | n.a. | n.p. | n.p. | 170 | 280 | 360 | 510 | n.a. | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

TIPS WITH GRIPS!

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

| | | | | | |
|---|---|---|---|---|---|
| 8.50 | 9.50 | 10.50 | 11.50 | 12.50 | 13.50 |
| 7.45 | 8.45 | 9.45 | 10.45 | 11.45 | 12.45 |
| 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | 11.45 |
| | | | | | |
| 228.0 | 242.0 | 254.0 | 303.0 | 316.0 | 329.0 |
| 173635 | 173735 | 173835 | 173935 | 173035 | 173135 |
| | | | | | |
| 260.0 | 275.0 | 289.0 | 348.0 | 363.0 | 378.0 |
| 174635 | 174735 | 174835 | 174935 | 174035 | 174135 |
| | | | | | |
| 282.0 | 297.0 | 312.0 | 382.0 | 396.0 | 411.0 |
| 175635 | 175735 | 175835 | 175935 | 175035 | 175135 |

Fig.: Order no. 154245

# Mobile scaffolding with platforms at a spacing of 2.0 m and chassis bar

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- Chassis bar made of galvanized steel for easy change of location
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Easy moving of the scaffolding on the chassis bar by loosening eight screws
- Central and lateral installation possible
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 12.5 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²





| | Chassis bar not included in standard scope of delivery | | | Distance between last and penultimate platform: 3.0 m |
|---|---|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 5.50 | 6.50 | 7.50 |
| B \| Scaffolding height in m | 3.35 | 4.45 | 5.45 | 6.45 |
| C \| Platform height in m | 2.35 | 3.45 | 4.45 | 5.45 |
| **Platform size 0.75 x 1.80 m** | | | | |
| Weight in kg | 81.0 | 128.0 | 156.0 | 168.0 |
| Order no. | 154245 | 154345 | 154445 | 154545 |
| **Platform size 0.75 x 2.45 m** | | | | |
| Weight in kg | 93.0 | 142.0 | 177.0 | 190.0 |
| Order no. | 155245 | 155345 | 155445 | 155545 |
| **Platform size 0.75 x 3.00 m** | | | | |
| Weight in kg | 100.0 | 148.0 | 189.0 | 203.0 |
| Order no. | 156245 | 156345 | 156445 | 156545 |



| Platform size | | 0.75 x 1.80 m | | | | | | | | | 0.75 x 2.45 m | | | | | | | | | 0.75 x 3.00 m | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 | | 2.35 | 3.45 | 4.45 | 5.45 | 6.45 | 7.45 | 8.45 | 9.45 | 10.45 |
| Parts list | Order no. | 154245 | 154345 | 154445 | 154545 | 154645 | 154745 | 154845 | 154945 | 154045 | Order no. | 155245 | 155345 | 155445 | 155545 | 155645 | 155745 | 155845 | 155945 | 155045 | Order no. | 156245 | 156345 | 156445 | 156545 | 156645 | 156745 | 156845 | 156945 | 156045 |
| Plug-on frame 1.00 m | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – |
| Plug-on frame 2.00 m | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Railing frame 1.00 m | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27956 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27957 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Platform with flap | 27931 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 27910 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 27933 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 |
| Toe board front side | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27908 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27938 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Chassis bar 2.00 m | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27923 | – | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 240 | 80 | 100 | 140 | 160 | 200 | 220 | 280 | 300 | 240 | 0 | 0 | 40 | 40 | 80 | 80 | 120 | 140 | 220 | 0 | 0 | 20 | 20 | 60 | 60 | 100 | 100 |
| | Lateral installation | n.p. | 120 | 140 | 180 | 220 | 260 | 300 | 340 | 380 | n.p. | 100 | 140 | 180 | 200 | 260 | 280 | 340 | 360 | n.p. | 100 | 120 | 180 | 200 | 240 | 280 | 320 | 340 |
| Outdoor use | Central installation | 240 | 80 | 100 | 140 | 160 | 220 | n.a. | n.a. | n.a. | 240 | 0 | 40 | 80 | 160 | 260 | n.a. | n.a. | n.a. | 260 | 0 | 60 | 120 | 200 | 320 | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | 120 | 160 | 200 | 280 | 380 | n.a. | n.a. | n.a. | n.p. | 100 | 180 | 240 | 340 | 440 | n.a. | n.a. | n.a. | n.p. | 120 | 220 | 280 | 380 | 500 | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

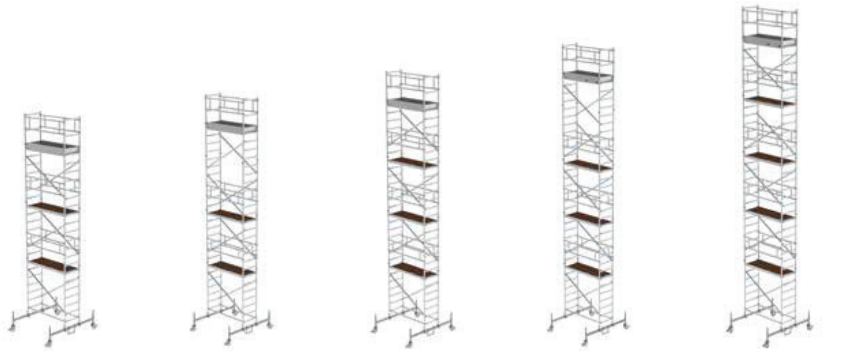

| Distance between last and penultimate platform: 3.0 m | | | Distance between last and penultimate platform: 3.0 m | |
|---|---|---|---|---|
| 8.50 | 9.50 | 10.50 | 11.50 | 12.50 |
| 7.45 | 8.45 | 9.45 | 10.45 | 11.45 |
| 6.45 | 7.45 | 8.45 | 9.45 | 10.45 |
| | | | | |
| 196.0 | 208.0 | 236.0 | 248.0 | 276.0 |
| 154645 | 154745 | 154845 | 154945 | 154045 |
| | | | | |
| | | | | |
| 225.0 | 238.0 | 273.0 | 287.0 | 322.0 |
| 155645 | 155745 | 155845 | 155945 | 155045 |
| | | | | |
| | | | | |
| 243.0 | 257.0 | 297.0 | 311.0 | 351.0 |
| 156645 | 156745 | 156845 | 156945 | 156045 |
| | | | | |

Fig.: Order no. 154646 and order no. 27912

# Mobile scaffolding with platforms at a spacing of 2.0 m and outrigger

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- High flexibility and stability due to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 12.4 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²




| | Outrigger not included in standard scope of delivery | | | Distance between last and penultimate platform: 3.0 m |
|---|---|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 5.40 | 6.40 | 7.40 |
| B \| Scaffolding height in m | 3.35 | 4.35 | 5.35 | 6.35 |
| C \| Platform height in m | 2.35 | 3.35 | 4.35 | 5.35 |
| **Platform size 0.75 x 1.80 m** | | | | |
| Weight in kg | 81.0 | 117.4 | 154.7 | 157.6 |
| Order no. | 154245 | 154346 | 154446 | 154546 |
| **Platform size 0.75 x 2.45 m** | | | | |
| Weight in kg | 93.0 | 129.7 | 165.0 | 177.6 |
| Order no. | 155245 | 155346 | 155446 | 155546 |
| **Platform size 0.75 x 3.00 m** | | | | |
| Weight in kg | 100.0 | 138.2 | 178.0 | 191.3 |
| Order no. | 156245 | 156346 | 156446 | 156546 |





| Platform size | | 0.75 x 1.80 m | | | | | | | | | 0.75 x 2.45 m | | | | | | | | | 0.75 x 3.00 m | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 |
| Parts list | Order no. | 154245 | 154346 | 154446 | 154546 | 154646 | 154746 | 154846 | 154946 | 154046 | Order no. | 155245 | 155346 | 155446 | 155546 | 155646 | 155746 | 155846 | 155946 | 155046 | Order no. | 156245 | 156346 | 156446 | 156546 | 156646 | 156746 | 156846 | 156946 | 156046 |
| Plug-on frame 1.00 m | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – |
| Plug-on frame 2.00 m | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Railing frame 1.00 m | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27956 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27957 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Platform with flap | 27931 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 27910 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 27933 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 |
| Toe board front side | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27908 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 27938 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Outrigger | 27926 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27926 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27926 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | | Ballasting kg | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 240 | 0 | 0 | 0 | 20 + 4x10 | 80 + 4x20 | 100 + 4x20 | 220 + 4x40 | 320 + 4x40 | 240 | 0 | 0 | 0 | 0 | 0 | 60 + 4x10 | 180 + 4x30 | 300 + 4x50 | 220 | 0 | 0 | 0 | 0 | 0 | 0 | 140 + 4x20 | 240 + 4x40 |
| | Lateral installation | n.p. | 0 | 0 | 0 | 20 + 4x10 | 80 + 4x20 | 100 + 4x20 | 220 + 4x40 | 320 + 4x40 | n.p. | 0 | 0 | 0 | 0 | 0 | 60 + 4x10 | 180 + 4x30 | 300 + 4x50 | n.p. | 0 | 0 | 0 | 0 | 0 | 0 | 140 + 4x20 | 240 + 4x40 |
| Outdoor use | Central installation | 240 | 0 | 0 | 0 | 20 + 4x10 | 280 + 4x50 | n.a. | n.a. | n.a. | 240 | 0 | 0 | 0 | 180 + 4x30 | n.p. | n.a. | n.a. | n.a. | 260 | 0 | 0 | 0 | 220 + 4x40 | n.p. | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | 0 | 0 | 0 | 20 + 4x10 | 280 + 4x50 | n.a. | n.a. | n.a. | n.p. | 0 | 0 | 0 | 180 + 4x30 | n.p. | n.a. | n.a. | n.a. | n.p. | 0 | 0 | 0 | 220 + 4x40 | n.p. | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

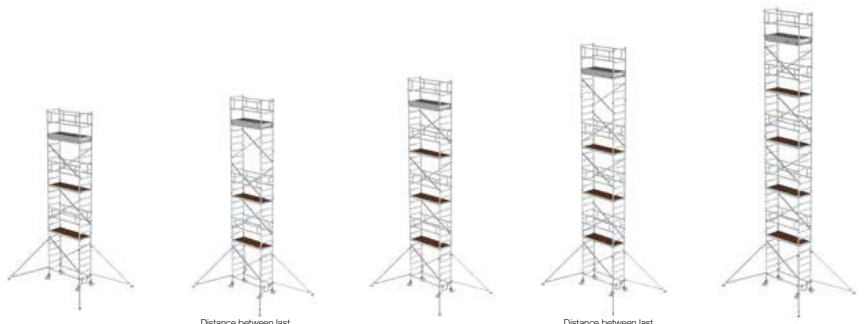

| | Distance between last and penultimate platform: 3.0 m | | Distance between last and penultimate platform: 3.0 m | |
|---|---|---|---|---|
| 8.40 | 9.40 | 10.40 | 11.40 | 12.40 |
| 7.35 | 8.35 | 9.35 | 10.35 | 11.35 |
| 6.35 | 7.35 | 8.35 | 9.35 | 10.35 |
| | | | | |
| 185.9 | 197.8 | 226.1 | 238.0 | 266.3 |
| 154646 | 154746 | 154846 | 154946 | 154046 |
| | | | | |
| 212.9 | 225.5 | 260.8 | 273.4 | 308.7 |
| 155646 | 155746 | 155846 | 155946 | 155046 |
| | | | | |
| 231.1 | 244.3 | 284.2 | 297.4 | 337.3 |
| 156646 | 156746 | 156846 | 156946 | 156046 |

Fig.: Order no. 177535

# Mobile scaffolding with outriggers

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- High flexibility and stability due to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 12.4 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²





Outrigger not included in standard scope of delivery

| | | | | | |
|---|---|---|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 5.40 | 6.40 | 7.40 |
| B \| Scaffolding height in m | 3.35 | 4.35 | 5.35 | 6.35 |
| C \| Platform height in m | 2.35 | 3.35 | 4.35 | 5.35 |

| Platform size 0.75 x 1.80 m | | | | |
|---|---|---|---|---|
| Weight in kg | 81.0 | 109.0 | 119.0 | 149.0 |
| Order no. | 177235 | 177335 | 177435 | 177535 |

| Platform size 0.75 x 2.45 m | | | | |
|---|---|---|---|---|
| Weight in kg | 93.0 | 123.0 | 134.0 | 172.0 |
| Order no. | 178235 | 178335 | 178435 | 178535 |

| Platform size 0.75 x 3.00 m | | | | |
|---|---|---|---|---|
| Weight in kg | 100.0 | 130.0 | 141.0 | 184.0 |
| Order no. | 179235 | 179335 | 179435 | 179535 |





| Platform size | | 0.75 x 1.80 m | | | | | | | | | 0.75 x 2.45 m | | | | | | | | | 0.75 x 3.00 m | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 |
| Parts list | Order no. | 177235 | 177335 | 177435 | 177535 | 177635 | 177735 | 177835 | 177935 | 177035 | Order no. | 178235 | 178335 | 178435 | 178535 | 178635 | 178735 | 178835 | 178935 | 178035 | Order no. | 179235 | 179335 | 179435 | 179535 | 179635 | 179735 | 179835 | 179935 | 179035 |
| Plug-on frame 1.00 m | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – |
| Plug-on frame 2.00 m | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27904 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Railing frame 1.00 m | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 27956 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 27957 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 |
| Platform with flap | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 27910 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 27933 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |
| Toe board front side | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27913 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 27908 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 27938 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Triangular outrigger | 27926 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27923 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27923 | – | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | Ballasting kg | | | | | | | | Ballasting kg | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 240 | 0 | 0 | 0 | 4 x 10 | 40+ 4 x 10 | 40+ 4 x 20 | 20+ 4 x 30 | 20+ 4 x 40 | 240 | 0 | 0 | 0 | 0 | 0 | 4 x 10 | 4 x 20 | 20+ 4 x 30 | 220 | 0 | 0 | 0 | 0 | 0 | 0 | 4 x 10 | 4 x 20 |
| | Lateral installation | n.p. | 0 | 0 | 0 | 4 x 10 | 40+ 4 x 10 | 40+ 4 x 20 | 20+ 4 x 30 | 20+ 4 x 40 | n.p. | 0 | 0 | 0 | 0 | 0 | 4 x 10 | 4 x 20 | 20+ 4 x 30 | n.p. | 0 | 0 | 0 | 0 | 0 | 0 | 4 x 10 | 4 x 20 |
| Outdoor use | Central installation | 240 | 0 | 0 | 0 | 4 x 10 | 50+ 4 x 40 | n.a. | n.a. | n.a. | 240 | 0 | 0 | 20 | 4 x 30 | 250+ 4 x 50 | n.a. | n.a. | n.a. | 260 | 0 | 0 | 20+ 4 x 10 | 20+ 4 x 30 | 20+ 4 x 50 | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | 0 | 0 | 0 | 4 x 10 | 50+ 4 x 40 | n.a. | n.a. | n.a. | n.p. | 0 | 0 | 20 | 4 x 30 | 250+ 4 x 50 | n.a. | n.a. | n.a. | n.p. | 0 | 0 | 20+ 4 x 10 | 20+ 4 x 30 | 20+ 4 x 50 | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

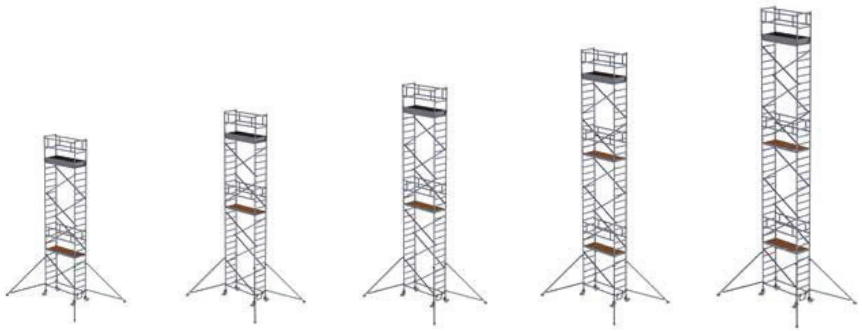

| | | | | |
|---|---|---|---|---|
| 8.40 | 9.40 | 10.40 | 11.40 | 12.40 |
| 7.35 | 8.35 | 9.35 | 10.35 | 11.35 |
| 6.35 | 7.35 | 8.35 | 9.35 | 10.35 |

| | | | | |
|---|---|---|---|---|
| 159.0 | 170.0 | 179.0 | 210.0 | 219.0 |
| 177635 | 177735 | 177835 | 177935 | 177035 |

| | | | | |
|---|---|---|---|---|
| 183.0 | 196.0 | 207.0 | 244.0 | 255.0 |
| 178635 | 178735 | 178835 | 178935 | 178035 |

| | | | | |
|---|---|---|---|---|
| 195.0 | 209.0 | 220.0 | 263.0 | 274.0 |
| 179635 | 179735 | 179835 | 179935 | 179035 |

Fig.: Order no. 167535

# Mobile scaffolding with outrigger and double platform

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- High flexibility and stability due to folding outriggers
- Ideal for wall mounting or moving in narrow aisles
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Large-format work surface with 1.35 m width
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 13.4 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²





| | | | | |
|---|---|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 5.40 | 6.40 | 7.40 |
| B \| Scaffolding height in m | 3.35 | 4.35 | 5.35 | 6.35 |
| C \| Platform height in m | 2.35 | 3.35 | 4.35 | 5.35 |

| Platform size 1.35 x 1.80 m | | | | |
|---|---|---|---|---|
| Weight in kg | 106.0 | 119.0 | 148.0 | 198.0 |
| Order no. | 167235 | 167335 | 167435 | 167535 |

| Platform size 1.35 x 2.45 m | | | | |
|---|---|---|---|---|
| Weight in kg | 122.0 | 137.0 | 168.0 | 227.0 |
| Order no. | 168235 | 168335 | 168435 | 168535 |

| Platform size 1.35 x 3.00 m | | | | |
|---|---|---|---|---|
| Weight in kg | 133.0 | 148.0 | 180.0 | 250.0 |
| Order no. | 169235 | 169335 | 169435 | 169535 |





| Platform size | 1.35 x 1.80 m | | | | | | | | | | 1.35 x 2.45 m | | | | | | | | | | 1.35 x 3.00 m | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | 11.35 | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | 11.35 | 2.35 | 3.35 | 4.35 | 5.35 | 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | 11.35 |
| Parts list | Order no. | 167235 | 167335 | 167435 | 167535 | 167635 | 167735 | 167835 | 167935 | 167035 | 167135 | Order no. | 168235 | 168335 | 168435 | 168535 | 168635 | 168735 | 168835 | 168935 | 168035 | 168135 | Order no. | 169235 | 169335 | 169435 | 169535 | 169635 | 169735 | 169835 | 169935 | 169035 | 169135 |
| Plug-on frame 1.00 m | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 |
| Plug-on frame 2.00 m | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 27901 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 |
| Railing frame 1.00 m | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 27956 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 27957 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 |
| Platform with flap | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27910 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27933 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| Platform without flap | 27932 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27930 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27934 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| Toe board front side | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 | 27908 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 | 27938 | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 12 | 14 | 16 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Triangular outrigger | 27926 | - | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27926 | - | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27926 | - | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | | Ballasting kg | | | | | | | | | | Ballasting kg | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 60 | 130 | 0 | 0 | 0 | 0 | 0 | 40 | 4x20 | 4x30 | 40 | 120 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | 30 | 100 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Lateral installation | n.p. | n.p. | 0 | 0 | 0 | 0 | 0 | 40 | 4x20 | 4x30 | n.p. | n.p. | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | n.p. | n.p. | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Outdoor use | Central installation | 80 | 160 | 0 | 0 | 4x20 | 80+ 4x40 | n.a. | n.a. | n.a. | n.a. | 90 | 190 | 0 | 0 | 4x10 | 4x40 | n.a. | n.a. | n.a. | n.a. | 100 | 190 | 0 | 0 | 4x10 | 60+ 4x40 | n.a. | n.a. | n.a. | n.a. |
| | Lateral installation | n.p. | n.p. | 160 | 250 | 340 | 490 | n.a. | n.a. | n.a. | n.a. | n.p. | n.p. | 0 | 0 | 4x10 | 4x40 | n.a. | n.a. | n.a. | n.a. | n.p. | n.p. | 0 | 0 | 4x10 | 60+ 4x40 | n.a. | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

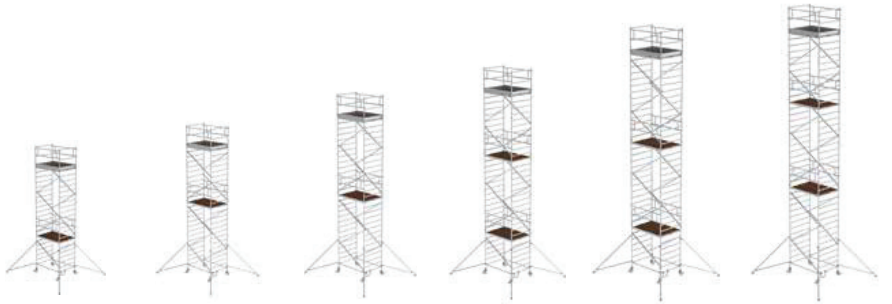

| | | | | | |
|---|---|---|---|---|---|
| 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 |
| 7.35 | 8.35 | 9.35 | 10.35 | 11.35 | 12.35 |
| 6.35 | 7.35 | 8.35 | 9.35 | 10.35 | 11.35 |
| | | | | | |
| 210.0 | 224.0 | 236.0 | 285.0 | 298.0 | 311.0 |
| 167635 | 167735 | 167835 | 167935 | 167035 | 167135 |
| | | | | | |
| 242.0 | 257.0 | 271.0 | 330.0 | 344.0 | 359.0 |
| 168635 | 168735 | 168835 | 168935 | 168035 | 168135 |
| | | | | | |
| 264.0 | 279.0 | 294.0 | 363.0 | 378.0 | 393.0 |
| 169635 | 169735 | 169835 | 169935 | 169035 | 169135 |

Fig.: Order no. 167300 and order no. 27912

# Mobile scaffolding with inclined ascents and outrigger

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Inclined ascents from platform to platform with 100 mm deep steps and handrail for safe ascent and descent as on stairs, especially with loads
- Modular kit principle for flexible use: All scaffolding parts are also available individually as spare or extension parts
- High flexibility and stability due to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Unhindered access thanks to opening in the entry frame
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Large-format work surface with 1.35 m width
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools from platform to platform thanks to plug-in connections and quick-release fasteners
- Light weight of the individual parts for easy handling
- Different platform lengths available (1.80/2.45/3.0 m)
- Working heights up to 12.4 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m²



Outrigger not included in standard scope of delivery

| | | |
|---|---|---|
| A \| Approx. max. working height in m | 4.40 | 6.40 |
| B \| Scaffolding height in m | 3.35 | 5.35 |
| C \| Platform height in m | 2.35 | 4.35 |

| Platform size 1.35 x 1.80 m | | |
|---|---|---|
| Weight in kg | 111.0 | 180.0 |
| Order no. | 167100 | 167200 |

| Platform size 01.35 x 2.45 m | | |
|---|---|---|
| Weight in kg | 117.0 | 191.0 |
| Order no. | 167110 | 167210 |

| Platform size 1.35 x 3.00 m | | |
|---|---|---|
| Weight in kg | 124.0 | 204.0 |
| Order no. | 167120 | 167220 |





| Platform size | | 1.35 x 1.80 m | | | | | 1.35 x 2.45 m | | | | | | 1.35 x 3.00 m | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 2.35 | 4.35 | 6.35 | 8.35 | 10.35 | | 2.35 | 4.35 | 6.35 | 8.35 | 10.35 | | 2.35 | 4.35 | 6.35 | 8.35 | 10.35 |
| Parts list | Order no. | 167100 | 167200 | 167300 | 167400 | 167500 | Order no. | 167110 | 167210 | 167310 | 167410 | 167510 | Order no. | 167120 | 167220 | 167320 | 167420 | 167520 |
| Entry frame | 27928 | 1 | 1 | 1 | 1 | 1 | 27928 | 1 | 1 | 1 | 1 | 1 | 27928 | 1 | 1 | 1 | 1 | 1 |
| Plug-on frame 2.00 m | 27901 | 1 | 3 | 5 | 7 | 9 | 27901 | 1 | 3 | 5 | 7 | 9 | 27901 | 1 | 3 | 5 | 7 | 9 |
| Railing frame 1.00 m | 27903 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 3 | 4 | 5 | 6 | 27956 | 2 | 3 | 4 | 5 | 6 | 27957 | 2 | 3 | 4 | 5 | 6 |
| Platform with flap | 27970 | 1 | 1 | 1 | 1 | 1 | 27985 | 1 | 1 | 1 | 1 | 1 | 27986 | 1 | 1 | 1 | 1 | 1 |
| Platform without flap | 27932 | 1 | 2 | 3 | 4 | 5 | 27930 | 1 | 2 | 3 | 4 | 5 | 27934 | 1 | 2 | 3 | 4 | 5 |
| Toe board front side | 27911 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 | 27911 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | 2 | 2 | 2 | 2 | 2 | 27914 | 2 | 2 | 2 | 2 | 2 | 27944 | 2 | 2 | 2 | 2 | 2 |
| Push-up bottom | 27961 | 1 | 1 | 1 | 1 | 1 | 27963 | 1 | 1 | 1 | 1 | 1 | 27965 | 1 | 1 | 1 | 1 | 1 |
| Ascent | 27962 | - | 1 | 2 | 3 | 4 | 27964 | - | 1 | 2 | 3 | 4 | 27966 | - | 1 | 2 | 3 | 4 |
| Handrail | 27929 | - | 1 | 2 | 3 | 4 | 27983 | - | 1 | 2 | 3 | 4 | 27984 | - | 1 | 2 | 3 | 4 |
| Top handrail | 27939 | 1 | 1 | 1 | 1 | 1 | 27967 | 1 | 1 | 1 | 1 | 1 | 27968 | 1 | 1 | 1 | 1 | 1 |
| Diagonal brace | 27937 | 1 | 2 | 3 | 4 | 5 | 27908 | 1 | 2 | 3 | 4 | 5 | 27938 | 1 | 2 | 3 | 4 | 5 |
| Horizontal brace | 27935 | 2 | 2 | 2 | 2 | 2 | 27907 | 2 | 2 | 2 | 2 | 2 | 27936 | 2 | 2 | 2 | 2 | 2 |
| Triangular outrigger | 27926 | – | 4 | 4 | 4 | 4 | 27926 | – | 4 | 4 | 4 | 4 | 27926 | – | 4 | 4 | 4 | 4 |
| Swivel castor, Ø 200 mm | 27917 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 | 27917 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 | 27940 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | Ballasting kg | | | | | Ballasting kg | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 50 | 0 | 0 | 0 | 4 x 10 | 50 | 0 | 0 | 0 | 0 | 50 | 0 | 0 | 0 | 0 |
| | Lateral installation | n.p. | 0 | 0 | 0 | 4 x 10 | n.p. | 0 | 0 | 0 | 0 | n.p. | 0 | 0 | 0 | 0 |
| Outdoor use | Central installation | 60 | 0 | 20+ 4 x 10 | n.a. | n.a. | 60 | 0 | 40+ 4 x 20 | n.a. | n.a. | 60 | 0 | 20+ 4 x 40 | n.a. | n.a. |
| | Lateral installation | n.p. | 0 | 20+ 4 x 10 | n.a. | n.a. | n.p. | 0 | 40+ 4 x 20 | n.a. | n.a. | n.p. | 0 | 20+ 4 x 40 | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

| | | |
|---|---|---|
| 8.40 | 10.40 | 12.40 |
| 7.35 | 9.35 | 11.35 |
| 6.35 | 8.35 | 10.35 |
| 231.0 | 283.0 | 335.0 |
| 167300 | 167400 | 167500 |
| 249.0 | 306.0 | 363.0 |
| 167310 | 167410 | 167510 |
| 267.0 | 330.0 | 393.0 |
| 167320 | 167420 | 167520 |

# Folding scaffolding

Fig.: Order no. 115301

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Folding frame made of rectangular tube side-rails with self-locking hinges
- For narrow passages in assembled condition (art. 115301)
- Space-saving transport and storage
- Four Ø 125 mm swivel castors with locking mechanisms
- Slip-resistant platform for secure standing
- Delivery is made in component groups. Once assembled, the scaffolding can be quickly set up and removed without tools
- Different platform widths available (0.75/1.35 m)
- Working heights up to 3.0 m
- Type-tested
- Load class/scaffolding group 2: 1.5 kN/m²

Fig.: Order no. 115301

| Platform size | | 0.75 x 1.80 m | 1.35 x 1.80 m |
|---|---|---|---|
| Platform height in m | | 0.99 | 0.99 |
| Parts list | Order no. | 115301 | 115401 |
| Folding frame unit with 4 Ø 125 mm swivel castors with locking mechanism | 27945 | 1 | – |
| Folding frame unit with 4 Ø 125 mm swivel castors with locking mechanism | 27946 | – | 1 |
| Platform without flap | 27254 | 1 | 2 |

| | | |
|---|---|---|
| Approx. max. working height in m | 3.00 | 3.00 |
| Scaffolding height in m | 1.72 | 1.72 |
| Platform height in m | 0.99 | 0.99 |
| Platform size in m | 0.75 x 1.80 | 1.35 x 1.80 |
| Weight in kg | 36.0 | 54.0 |
| Order no. | 115301 | 115401 |





# Folding scaffolding with extension unit

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Folding frame made of rectangular tube side-rails with self-locking hinges
- Space-saving transport and storage
- Sturdy railing for safety railing
- Slip-resistant platform with large trapdoor for secure standing
- Four Ø 125 mm swivel castors with locking mechanisms
- Railing frame with horizontal braces for safety railing
- Delivery is made in component groups. Once assembled, the scaffolding can be quickly set up and removed without tools
- Different platform widths available (0.75/1.35 m)
- Working heights up to 3.6 m
- Type-tested
- Load class/scaffolding group 2: 1.5 kN/m²

TIPS WITH GRIPS!

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

| | Ballasting kg | | | | | |
|---|---|---|---|---|---|---|
| Platform size | 0.75 x 1.80 | | | 1.35 x 1.80 | | |
| Platform height | 1.54 | 1.26 | 0.99 | 1.54 | 1.26 | 0.99 |
| Indoor use | 60 | 40 | 0 | 0 | 0 | 0 |
| Outdoor use | 60 | 40 | 0 | 0 | 0 | 0 |

Fig.: Order no. 115601 and order no. 27912

| Platform size | | 0.75 x 1.80 m | 1.35 x 1.80 m |
|---|---|---|---|
| Platform height in m | | 1.54 | 1.54 |
| Parts list | Order no. | 115601 | 115701 |
| Folding frame unit with 4 Ø 125 mm swivel castors with locking mechanism | 27945 | 1 | – |
| Folding frame unit with 4 Ø 125 mm swivel castors with locking mechanism | 27946 | – | 1 |
| Platform with flap | 27931 | 1 | 1 |
| Platform without flap | 27254 | – | 1 |
| Horizontal brace | 27935 | 3 | 3 |
| Railing frame 0.75 m | 27255 | 2 | – |
| Railing frame 1.35 m | 27256 | – | 2 |

| | | |
|---|---|---|
| Approx. max. working height in m | 3.60 | 3.60 |
| Scaffolding height in m | 2.65 | 2.65 |
| Platform height in m | 1.54 | 1.54 |
| Platform size in m | 0.75 x 1.80 | 1.35 x 1.80 |
| Weight in kg | 50.0 | 68.0 |
| Order no. | 115601 | 115701 |

Fig.: Order no. 115200

# Folding scaffolding with outrigger

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Folding frame made of rectangular tube side-rails with self-locking hinges
- Space-saving transport and storage
- Four Ø 125 mm swivel castors with locking mechanisms and spindles for height compensation
- Slip-resistant platform for secure standing
- Aluminium toe boards and railing frames with integrated knee board as safety railing (from platform height 2.8 m)
- Simple setup and removal without tools
- Different platform widths available (0.75/1.35 m)
- Platform lengths 2.45 m and 3.0 m on request
- Working heights up to 13.8 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 2: 1.5 kN/m²

Fig.: Order no. 115200 and order no. 27926



Outrigger not included in standard scope of delivery

| | | | | | |
|---|---|---|---|---|---|
| A \| Approx. max. working height in m | 3.80 | 4.80 | 5.80 | 6.80 | 7.80 |
| B \| Scaffolding height in m | 2.80 | 3.80 | 4.80 | 5.80 | 6.80 |
| C \| Platform height in m | 1.80 | 2.80 | 3.80 | 4.80 | 5.80 |

| Platform size 0.75 x 1.80 m | | | | | |
|---|---|---|---|---|---|
| Weight in kg | 62.0 | 87.0 | 109.0 | 144.0 | 149.0 |
| Order no. | 115100 | 115128 | 115138 | 115148 | 115158 |




without outrigger

| Platform size 1.35 x 1.80 m | | | | | |
|---|---|---|---|---|---|
| Weight in kg | 85.0 | 112.0 | 121.0 | 191.0 | 200.0 |
| Order no. | 115200 | 115228 | 115238 | 115248 | 115258 |





| Platform size | | 0.75 x 1.80 m | | | | | | | | | | 1.35 x 1.80 m | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Platform height in m | | 1.80 | 2.80 | 3.80 | 4.80 | 5.80 | 6.80 | 7.80 | 8.80 | 9.80 | 10.80 | | 1.80 | 2.80 | 3.80 | 4.80 | 5.80 | 6.80 | 7.80 | 8.80 | 9.80 | 10.80 | 11.80 |
| Parts list | Order no. | 115100 | 115128 | 115138 | 115148 | 115158 | 115168 | 115178 | 115188 | 115198 | 115108 | Order no. | 115200 | 115228 | 115238 | 115248 | 115258 | 115268 | 115278 | 115288 | 115298 | 115208 | 115211 |
| Folding frame unit | 27871 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27972 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Plug-on frame 1.00 m | 27905 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | 27902 | – | 2 | – | 2 | – | 2 | – | 2 | – | 2 | - |
| Plug-on frame 2.00 m | 27904 | - | - | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 27901 | - | - | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Railing frame 1.00 m | 27906 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27903 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Railing lengthwise | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 27955 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | 6 |
| Platform with flap | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 27931 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| Platform without flap | | - | - | - | - | - | - | - | - | - | - | 27932 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| Toe board front side | 27913 | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27911 | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Toe board long side | 27943 | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 27943 | - | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Diagonal brace | 27937 | - | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 27937 | - | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 |
| Horizontal brace | 27935 | - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27935 | - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Triangular outrigger | 27926 | - | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27926 | - | - | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Swivel castor, Ø 125 mm | 27973 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 27973 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Step-on bracket | 27940 | - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 27940 | - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| | | Ballasting kg | | | | | | | | | | Ballasting kg | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Indoor use | Central installation | 170 | 280 | 0 | 0 | 0 | 0 | 0 | 30 | 70 | 200 | 40 | 80 | 140 | 0 | 0 | 0 | 0 | 0 | 20 | 70 | 110 |
| | Lateral installation | 170 | 280 | 0 | 0 | 0 | 0 | 0 | 30 | 70 | 200 | 40 | 80 | 140 | 0 | 0 | 0 | 0 | 0 | 20 | 70 | 110 |
| Outdoor use | Central installation | 170 | 280 | 0 | 0 | 0 | 0 | 60 | n.a. | n.a. | n.a. | 40 | 80 | 140 | 0 | 0 | 100 | 270 | n.a. | n.a. | n.a. | n.a. |
| | Lateral installation | 170 | 280 | 0 | 0 | 0 | 0 | 60 | n.a. | n.a. | n.a. | 40 | 80 | 140 | 0 | 0 | 100 | 270 | n.a. | n.a. | n.a. | n.a. |

n.p. = not possible
n.a. = not allowed

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

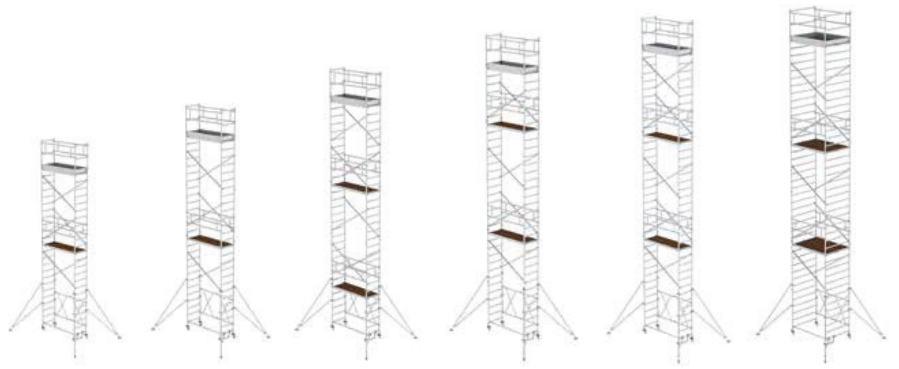

| | | | | | |
|---|---|---|---|---|---|
| 8.80 | 9.80 | 10.80 | 11.80 | 12.80 | 13.80 |
| 7.80 | 8.80 | 9.80 | 10.80 | 11.80 | 12.80 |
| 6.80 | 7.80 | 8.80 | 9.80 | 10.80 | 11.80 |
| | | | | | |
| 161.0 | 166.0 | 201.0 | 206.0 | 218.0 | – |
| 115168 | 115178 | 115188 | 115198 | 115108 | – |
| | | | | | |
| 213.0 | 222.0 | 275.0 | 284.0 | 297.0 | 306.0 |
| 115268 | 115278 | 115288 | 115298 | 115208 | 115211 |

Fig.: Order no. 115500

# Folding scaffolding with triple platform

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Double folding frame made of rectangular tube side-rails with self-locking hinges
- Large work area of 4.5 m²
- Space-saving transport and storage
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles for height compensation
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Simple setup and removal without tools
- Working heights up to 10.4 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 2: 1.5 kN/m²

The required number of ballast weights depends on the type, installation location and scaffolding height. The instructions for installation and use provide detailed information on this subject.

TIPS WITH GRIPS!

| Ballasting kg | | | | | |
|---|---|---|---|---|---|
| Order no. | | 115500 | 115543 | 115563 | 115583 |
| Indoor use | Central installation | 0 | 30 | 50 | 130 |
| Outdoor use | Central installation | 0 | 90 | 200 | n.a. |

| Approx. max. working height in m | 4.40 | 6.40 | 8.40 | 10.40 |
|---|---|---|---|---|
| Scaffolding height in m | 3.35 | 5.35 | 7.35 | 9.35 |
| Platform height in m | 2.35 | 4.35 | 6.35 | 8.35 |
| Platform size in m | 1.90 x 2.45 | 1.90 x 2.45 | 1.90 x 2.45 | 1.90 x 2.45 |
| Weight in kg | 163.0 | 201.0 | 308.0 | 346.0 |
| Order no. | 115500 | 115543 | 115563 | 115583 |





# Folding scaffolding with triple platform telescopic

- Mobile scaffolding made of sturdy aluminium round tube with welded frame parts
- Double folding frame made of rectangular tube side-rails with self-locking hinges
- Height-adjustable stand tubes for adjusting the platform height at 150 mm intervals from 0.53 m to 1.63 m
- Large work area of 3.25 m²
- Space-saving transport and storage
- Four Ø 125 mm swivel castors with locking mechanisms
- Simple setup and removal without tools
- Optional access ladder with automatically closing quick-release fasteners for easy access and exit
- Working heights up to 3.6 m
- Type-tested
- Load class/scaffolding group 2: 1.5 kN/m²

Fig.: Order no. 115800 with ladder order no. 27142

| Approx. max. working height in m | 3.60 |
|---|---|
| Scaffolding height in m | 1.95–2.70 |
| Platform height in m | 0.53–1.63 |
| Platform size in m | 1.90 x 1.90 |
| Weight in kg | 104.0 |
| Order no. | 115800 |

Accessories Details and complete overview starting on page 268

Access ladder
Order no. 27142

# ML folding scaffolding

Fig.: Order no. 11301

- Folding ladder scaffolding made of sturdy rectangular tube side-rails
- Folding frame with self-locking hinges
- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Space-saving transport and storage
- For narrow passages in assembled condition thanks to a chassis bar width of 800 mm
- Four Ø 125 mm swivel castors with locking mechanisms
- Slip-resistant platform for secure standing
- Delivery is made in component groups. Once assembled, the scaffolding can be quickly set up and removed without tools
- Optional telescopic outriggers for even greater stability
- Working heights up to 3.0 m
- Maximum load: 150 kg

Quick hook-in platform

4 smooth-running Ø 125 mm swivel castors with locking mechanism

| | Folding scaffolding without telescopic outrigger | Folding scaffolding with telescopic outrigger |
|---|---|---|
| Approx. max. working height in m | 3.00 | 3.00 |
| Scaffolding height in m | 1.88 | 1.88 |
| Platform height in m | 1.00 | 1.00 |
| Platform size in m | 0.60 x 1.60 | 0.60 x 1.60 |
| Weight in kg | 30.0 | 34.0 |
| Order no. | 11300 | 11301 |

## Accessories

Details and complete overview starting on page 268

Telescopic outrigger
Order no. 11302

## Product videos

Product video
ML folding
scaffolding





# Ladder platform

- In combination with two suitable ladders, a safe workplace is created at height
- Slip-proof platform with trapdoor
- Designed for wall-side application – ideal for inside and outside work on roof, halls, facades, etc.
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Different platform lengths available (1.80/2.45/3.0 m)
- Significant components can also be used for mobile scaffolding
- Working heights up to 7.0 m
- Load class/scaffolding group 2: 1.5 kN/m²

**Note:** Ladders are not included in the scope of delivery. Only 1-piece straight ladders may be used that have an outer width of 420 mm up to max. 20 rungs (article no.: 10006–10020, 10306–10320, 10506–10520)

Fig.: Order no. 154162 (ladders not included in scope of delivery)

| Working height depending on ladder length, max. 7.00 m | | | |
|---|---|---|---|
| Platform length in m | 1.80 | 2.45 | 3.00 |
| Weight in kg | 80 | 95 | 104 |
| Order no. | 154152 | 154162 | 154172 |

# Components, accessories and spare parts

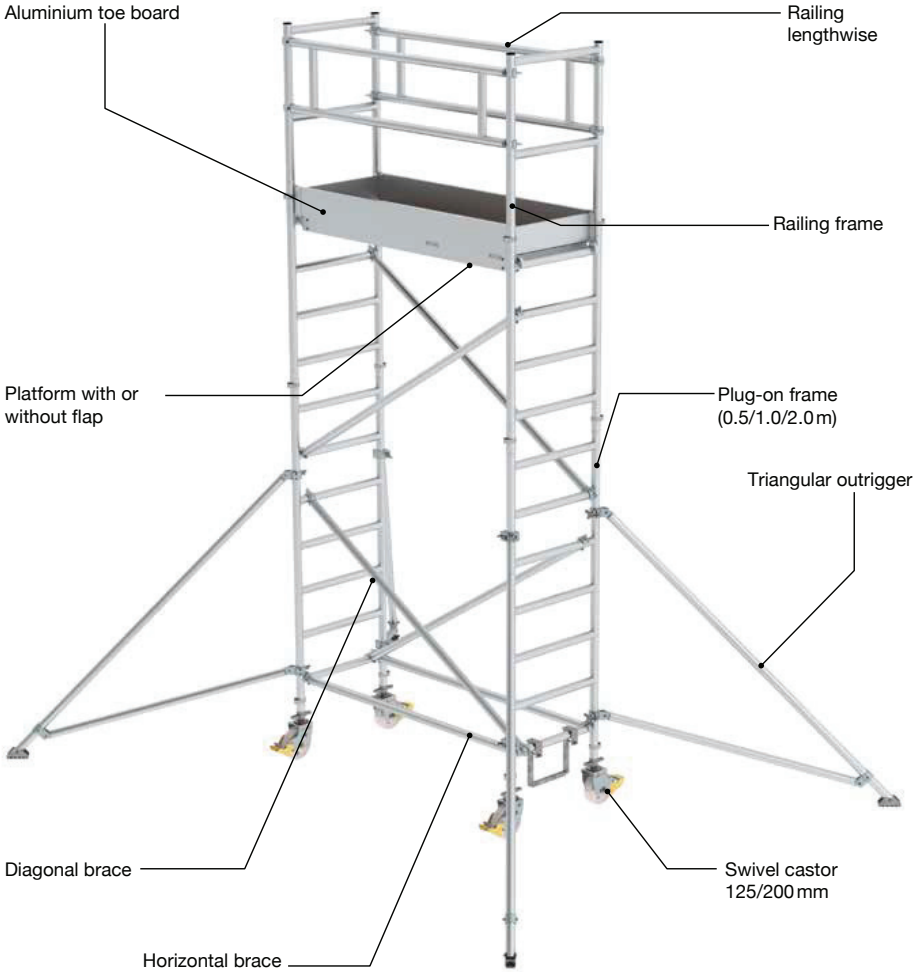






## Railing lengthwise

| For scaffolding length in m | 1.80 | 2.45 | 3.00 |
|---|---|---|---|
| Weight in kg | 3.0 | 4.5 | 4.9 |
| Order no. | 27955 | 27956 | 27957 |

Fig.: Order no. 27955

## Plug-on frame

- For scaffolding width 0.75 m

| Height in m | 0.50 | 1.00 | 2.00 |
|---|---|---|---|
| Weight in kg | 2.3 | 4.0 | 6.8 |
| Order no. | 27918 | 27905 | 27904 |

Fig.: Order no. 27905

## Railing frame Front side 1.0 m

| For scaffolding width in m | 0.75 | 1.35 | 1.90 |
|---|---|---|---|
| Weight in kg | 2.3 | 3.5 | 4.2 |
| Order no. | 27906 | 27903 | 27950 |

Fig.: Order no. 27906

## Plug-on frame

- For scaffolding width 1.35 m

| Height in m | 0.50 | 1.00 | 2.00 |
|---|---|---|---|
| Weight in kg | 3.1 | 4.9 | 9.4 |
| Order no. | 27919 | 27902 | 27901 |

Fig.: Order no. 27902

## Railing frame front side

- For folding scaffolding extension unit

| Suitable for folding scaffolding with order no. | 115600 | 115700 |
|---|---|---|
| Order no. | 27251 | 27252 |
| Suitable for folding scaffolding with order no. | 115601 | 115701 |
| Order no. | 27255 | 27256 |

Fig.: Order no. 27251

## Entry frame

- For scaffolding width 1.35 m

| Height in m | 2.00 |
|---|---|
| Weight in kg | 9.4 |
| Order no. | 27928 |

Fig.: Order no. 27928

## Plug-on frame

- For folding scaffolding with triple platform
- For scaffolding width 1.9 m

| Height in m | 2.00 |
|---|---|
| Weight in kg | 13.6 |
| Order no. | 27942 |

Fig.: Order no. 27942

## Folding frame unit

| For scaffolding width in m | 0.75 | 0.75 | 0.75 | 1.35 | 1.35 | 1.35 |
|---|---|---|---|---|---|---|
| For scaffolding length in m | 1.80 | 2.45 | 3.0 | 1.80 | 2.45 | 3.0 |
| Weight in kg | 19.3 | 20.3 | 21.5 | 20.1 | 25.0 | 26.2 |
| Order no. | 27971 | 70514* | 70517* | 27972 | 70515* | 70518* |

Fig.: Order no. 27971

* Delivery time: 10 working days

## Folding frame unit

- Suitable for folding scaffolding with order no. 115301–115601
- Suitable for folding scaffolding with triple platform, order no. 115500–115583

| For scaffolding width in m | 0.75 | 1.35 | 1.90 |
|---|---|---|---|
| Weight in kg | 22.0 | 26.3 | 19.5 |
| Order no. | 27945 | 27946 | 27941 |

Fig.: Order no. 27945

## Aluminium toe board long side

| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 3.4 | 5.0 | 5.2 |
| Order no. | 27943 | 27914 | 27944 |

Fig.: Order no. 27943

## Platform without flap

| For scaffolding length in m | 1.80 | 1.80 | 2.45 | 3.0 |
|---|---|---|---|---|
| Weight in kg | 13.9 | 16.5 | 20.2 | 25.0 |
| Order no. | 27254 | 27932 | 27930 | 27934 |

Fig.: Order no. 27254

## Aluminium toe board front side

| For scaffolding width in m | 0.75 | 1.35 | 1.90 |
|---|---|---|---|
| Weight in kg | 1.4 | 1.7 | 3.0 |
| Order no. | 27913 | 27911 | 27949 |

Fig.: Order no. 27911

## Platform with flap

| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 16.8 | 20.5 | 25.3 |
| Order no. | 27931 | 27910 | 27933 |

Fig.: Order no. 27931

## Platform with longitudinal flap

- For mobile scaffolding with inclined ascents, top

| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 12.9 | 17.0 | 19.0 |
| Order no. | 27970 | 27985 | 27986 |

Fig.: Order no. 27970

## Scaffolding connector set

- For coupling mobile scaffolding for special requirements
- Produced taking the standard DIN EN 1004 into account
- Can be used with maximum platform heights of up to 3.8 m and platform widths of 1.35 m
- For platform width 0.75 m consisting of: 1 tread plate, 4 spring clips, 2 railing frames, 2 scaffolding connectors
- For platform width 1.35 m consisting of: 2 tread plates, 2 railing frames, 2 scaffolding connectors
- Length: 0.85 m
- Delivery time: 10 working days

| For scaffolding width 0.75 m | |
|---|---|
| Weight in kg | 11.6 |
| Order no. | 70505 |

| For scaffolding width 1.35 m | |
|---|---|
| Weight in kg | 11.6 |
| Order no. | 70522 |

Fig.: Order no. 70505





## Top handrail

- For mobile scaffolding with inclined ascent



| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 2.8 | 3.8 | 4.1 |
| Order no. | 27939 | 27967 | 27968 |

Fig.: Order no. 27939

## Inclined ascent

| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 8.7 | 11.5 | 13.0 |
| Order no. | 27962 | 27964 | 27966 |

Fig.: Order no. 27962

## Handrail

- For mobile scaffolding with inclined ascent



| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 2.8 | 3.8 | 4.1 |
| Order no. | 27929 | 27983 | 27984 |

Fig.: Order no. 27929

## Inclined ascent below

| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 8.7 | 11.5 | 13.0 |
| Order no. | 27961 | 27963 | 27965 |

Fig.: Order no. 27965

## Access ladder with self-closing quick-release fasteners

- 2-section
- Attachable

| Order no. | 27142 |
|---|---|

Fig.: Order no. 27142

## Horizontal brace



| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 1.5 | 2.0 | 2.2 |
| Order no. | 27935 | 27907 | 27936 |

Fig.: Order no. 27935

## Safety door on front side

- For conversion of standard mobile scaffolding towers for special requirements
- These accessories are manufactured in accordance with DIN EN 1004
- Delivery time: 10 working days

Fig.: Order no. 70507

| For scaffolding width 0.75 m | |
|---|---|
| Weight in kg | 6.6 |
| Order no. | 70507 |

| For scaffolding width 1.35 m | |
|---|---|
| Weight in kg | 10.6 |
| Order no. | 70508 |

Fig.: Order no. 70508

## Diagonal brace



| For scaffolding length in m | 1.80 | 2.45 | 3.0 |
|---|---|---|---|
| Weight in kg | 1.8 | 2.3 | 2.7 |
| Order no. | 27937 | 27908 | 27938 |

Fig.: Order no. 27937

## Scaffolding strut telescopic

- Universally applicable with clamping clip
- Delivery time 10 working days

| Telescopic from 1.7–2.5 m | |
|---|---|
| Weight in kg | 3.6 |
| Order no. | 70524 |

| Telescopic from 2.12–3.40 m | |
|---|---|
| Weight in kg | 4.2 |
| Order no. | 70520 |

Fig.: Order no. 70520

Fig.: Order no. 27973

## Swivel castor

- With parking brake and spindle for height adjustment (300 mm)
- Load capacity up to 300 kg at Ø 125 mm
- Load capacity up to 500 kg at Ø 200 mm
- Suitable for our chassis bars order no. 27923 and plug-on frames for scaffolding

| Ø in mm | 125 | 200 |
|---|---|---|
| Weight in kg | 4.0 | 6.5 |
| Order no. | 27973 | 27917 |

| Ø in mm | 200 | 200 |
|---|---|---|
| Weight in kg | 6.5 | 6.5 |
| Colour | Traceless grey | Black |
| Deployment | Hall floor | electrically conductive |
| Order no. | 27922 | 27921 |


Fig.: Order no. 27923

## Chassis bar

- For mobile scaffolding
- Galvanised steel

| Length in m | 2.0 |
|---|---|
| Weight in kg | 17.5 |
| Order no. | 27923 |

Fig.: Order no. 27141

## Chassis bar

- Incl. castors
- For standard scaffolding
- Galvanised steel

| Length in m | 1.5 |
|---|---|
| Weight in kg | 12.0 |
| Order no. | 27141 |

Fig.: Order no. 27959

## Swivel castor

- With locking device and pin
- Load capacity up to 300 kg at Ø 125 mm
- Load capacity up to 400 kg at Ø 200 mm

| Ø in mm | 125 | 200 |
|---|---|---|
| Weight in kg | 1.5 | 2.9 |
| Order no. | 27959 | 27958 |


Fig.: Order no. 27926

## Triangular outrigger

| Weight in kg | 4.2 |
|---|---|
| Order no. | 27926 |

Fig.: Order no. 27104

## Height-adjustable spindle

- 300 mm with foot plate

| Weight in kg | 4.0 |
|---|---|
| Order no. | 27104 |

Fig.: Order no. 27920

## Wall spacers

- Adjustable up to 1.0 m

| Weight in kg | 2.0 |
|---|---|
| Order no. | 27920 |





## Frame extension can be clamped on

- Safe standing on uneven ground
- Height-adjustable, can easily be fitted to the scaffolding tube if necessary
- Adjustment range max. 400 mm
- Delivery time: 10 working days

| Weight in kg | 2.3 |
|---|---|
| Order no. | 70506 |

Order no. 70506

## Storage tray

- Incl. holder and attachment
- Suitable for Ø 38–51 mm clamping range, universally applicable
- Payload: approx. 10 kg

| 500 x 220 mm | |
|---|---|
| Order no. | 19274 |

| 800 x 300 mm | |
|---|---|
| Order no. | 19276 |



Order no. 19274
Order no. 19276

## Step-on bracket

| Weight in kg | 2.1 |
|---|---|
| Order no. | 27940 |

Fig.: Order no. 27940

## Automatic steel hinge

- Incl. fixing material

| | Order no. |
|---|---|
| Scaffolding folding frame | 19477 |

Fig.: Order no. 19474

## Spring clip for mobile scaffolding

| With short bolt | |
|---|---|
| Order no. | 19413 |

Fig.: Order no. 19413

## Spring clip for mobile scaffolding

| With long bolt | |
|---|---|
| Order no. | 19430 |

Fig.: Order no. 19430

## Ballast weight

- For hanging in
- Please refer to the ballasting tables for the required quantity

| Weight in kg | 10.0 |
|---|---|
| Order no. | 27912 |


Fig.: Order no. 27912

## Telescopic outrigger

- Suitable for article no. 11300 and 11301
- 1 set = 4 pcs.

| Weight in kg | 4.0 |
|---|---|
| Order no. | 11302 |

Fig.: Order no. 27953

## Protective assembly railing: Safety railing for mobile scaffolding

- Folding additional frame for setup and removal of mobile scaffolding to minimise the risk of falling
- Easy assembly from the ground or from the platform already secured by struts by hooking the claws into the scaffolding frame
- Secured by snap-in hooks
- Simple installation without the need of tools
- Available in platform lengths 1.80/2.45/3.0 m



The folding additional frame is easy to handle and space-saving.

Snap-in hooks securely fix the protective assembly railing to the scaffolding frames.

Before climbing onto the first platform, the additional frame is easily inserted from the ground.

Secured by the "leading railing", the platform can now be safely stepped on and further scaffolding erected. The protective assembly railing is plugged in again in the "leading" position for the subsequent platforms.

| Additional frame suitable for platform size m | 1.80 | 2.45 | 3.00 |
|---|---|---|---|
| Width in m | 1.90 | 2.55 | 3.10 |
| Height in m | 1.61 | 1.61 | 1.61 |
| Transport dimensions in m | 1.91 x 0.22 x 0.87 | 2.56 x 0.22 x 0.87 | 3.11 x 0.22 x 0.87 |
| Weight in kg | 8.2 | 9.5 | 10.5 |
| Order no. | 27952 | 27953 | 27954 |





## Clip tray

- For carrying along and clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant
- Easy clip-on application, suitable for Ø 40 mm and Ø 50 mm round bars.

| Suitable for round bar, Ø | 40 mm | 50 mm |
|---|---|---|
| Order no. | 19080 | 19081 |

**Note:** As per BetrSichV § 3 (3), mobile scaffoldings must be subjected to testing each time there is a new set-up, after they have not been used for a longer period, following unusual events, such as accidents or natural phenomena acting on the scaffolding, for example, a heavy storm

Contact your employers' liability insurance association and the German Social Accident Insurance (DGUV) regarding test documents and reports. You can also use our checklist for the inspection in accordance with the German Ordinance on Industrial Safety and Health (BetrSichV): free download at www.steigtechnik.de in the Service section

TIPS WITH GRIPS!

## Inspection sticker

- The inspection sticker is standard on most products upon delivery
- Within the scope of the recurring inspections, this can be stuck over with a new inspection date
- 1 PU = 50 pcs.

| Order no. 19175 | Size 40 x 40 mm |
|---|---|

## Inventory sticker

- For quick and easy identification of ladders, scaffolds, etc.
- Pre-printed fields for department and inventory number
- Integrated inspection sticker, which can be overwritten or provided with a new inspection date as part of the mandatory recurring inspections
- 1 PU = 20 pcs.

| Order no. 19176 | Size 40 x 150 mm |
|---|---|