

DT-14-4,8

DT-14-4,8



Technical information

Application

For the fastening of waterproof membrane and insulation to solid, dense concrete of minimum grade C12/15.

Material

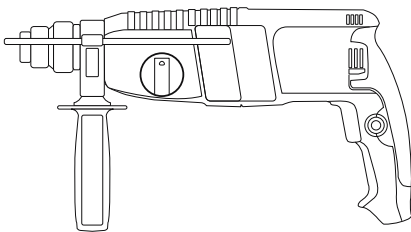
Fastener

- DT-14-4,8
Case hardened carbon steel
Durocoat® corrosion protection:
Resistance at 15 cycles of Kesternich test according to ETAG 006
- D.3.1. and FM Approval Standard 4470 requirements
Environment-friendly, free of chromium VI

Tools and accessories

Recommendation for pre-drilling



ZD15




- Hammer drill with weight class 2 - 3 kg, impact energy $\leq 2,5$ J

- Setting tool for the installation of DT impact anchor

Order information

	Mushroom head Ø 14 mm 	
KL clamping length M magazine loaded d thread diameter L length TL thread length t thickness of structure All measures in mm		

Product / Application		Approval	Order code DT-14- 4,8x 38			KL	Drill bits	Application information
■ Carbon steel 		Type	d	L	13	4,8x160	Build-up: Thickness concrete deck t: min. 60 mm. Edge distance: min. 60 mm Setting: Sd (Setting depth): min. 25 mm Depth of pilot hole to be min. 15 mm deeper than the setting depth of the DT impact anchor, depending on site conditions.	
	DT-14-	4,8x	38					